

MINISTRY OF DEVELOPMENT
NEGARA BRUNEI DARUSSALAM

"Bersekutu Bertambah Mutu"

**BRUNEI DARUSSALAM STANDARD
PIAWAI BRUNEI DARUSSALAM**

**PBD ISO 8905
ISO 8905 : 1988(E)
First edition 2010**

**SAWN TIMBER - TEST METHODS - DETERMINATION OF
ULTIMATE STRENGTH IN SHEARING PARALLEL TO GRAIN**

**MINISTRY OF DEVELOPMENT
NEGARA BRUNEI DARUSSALAM**

Copyright Reserved

Authority for Building Control and Construction Industry (ABCi)
Ministry of Development
Old Airport, Jalan Berakas
Bandar Seri Begawan BB 3510
Negara Brunei Darussalam

**SAWN TIMBER – TEST METHODS –
DETERMINATION OF ULTIMATE STRENGTH
IN SHEARING PARALLEL TO GRAIN**

**BRUNEI DARUSSALAM STANDARD
PIAWAI BRUNEI DARUSSALAM**

PBD ISO 8905
First Edition

National Foreword

This Brunei Darussalam Standard reproduces verbatim ISO 8905: 1988(E) and implements it as the Brunei Darussalam National Standard.

This Brunei Darussalam Standard is published under the direction of the Technical Committee on Timber Standards.

Attention is drawn to the fact that this Brunei Darussalam Standard does not confer any immunity from legal obligations in any contract for compliance to the Standard.

The Brunei Darussalam Standards are subject to periodical review according to the current needs of the local industries to keep abreast of progress in the industries concerned. Suggestions of amendments will be recorded and in due course brought to the notice of the committees concerned.

Amendments issued since publication :

Amd No.	Date of Issue	Text affected

CONTENTS

		Page (i)
Committee Representation		
1	Scope and Field of Application	1
2	References	1
3	Principle	1
4	Apparatus	1
5	Preparation of test pieces.....	2
6	Procedure	2
7	Calculation and Expression of Results	2
8	Test Report	2

INTERNATIONAL STANDARD

**ISO
8905**

First edition
1988-07-15



INTERNATIONAL ORGANIZATION FOR STANDARDIZATION
ORGANISATION INTERNATIONALE DE NORMALISATION
МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ

Sawn timber — Test methods — Determination of ultimate strength in shearing parallel to grain

*Bois sciés — Méthodes d'essai — Détermination de la contrainte de rupture en cisaillement
parallèle aux fibres*

Reference number
ISO 8905:1988 (E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council. They are approved in accordance with ISO procedures requiring at least 75 % approval by the member bodies voting.

International Standard ISO 8905 was prepared by Technical Committee ISO/TC 55, *Sawn timber and sawlogs*.

Users should note that all International Standards undergo revision from time to time and that any reference made herein to any other International Standard implies its latest edition, unless otherwise stated.

Sawn timber — Test methods — Determination of ultimate strength in shearing parallel to grain

1 Scope and field of application

This International Standard specifies a method of testing sawn timber of coniferous and broadleaved species in shearing parallel to the grain to determine the ultimate strength.

2 Reference

ISO 3130, *Wood — Determination of moisture content for physical and mechanical tests.*

3 Principle

Determination of the maximum load which causes the test piece to break by shearing as a result of compressive stresses, and calculation of the stress at this load.

4 Apparatus

4.1 Test machine, allowing measurement of the load to an accuracy of $\pm 1\%$.

4.2 Device, capable of ensuring the maximum tangential stress in the area of the expected shearing (see figure 2).

4.3 Measuring instrument, to determine the dimensions of the working section to an accuracy of 0,1 mm.

4.4 Equipment for the determination of moisture content, in accordance with ISO 3130.

5 Preparation of test pieces

5.1 The shape and dimensions of the test piece shall be in accordance with those shown in figure 1. The thickness, t , of the test piece shall be the thickness of sawn timber to be tested.

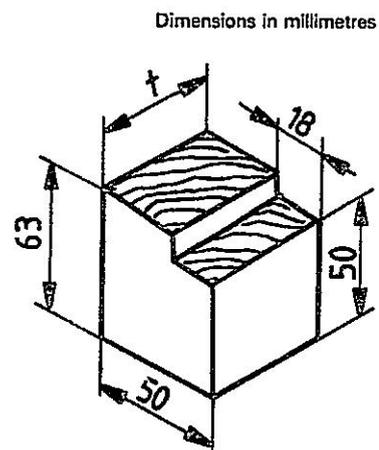


Figure 1 — Test piece

5.2 To determine the minimum strength value, the test pieces shall be cut from the weakest portions of sawn timber; this can be determined either visually or by the results of mechanized grading. Test pieces may be taken from the portions of sawn timber left after sampling for other tests.